
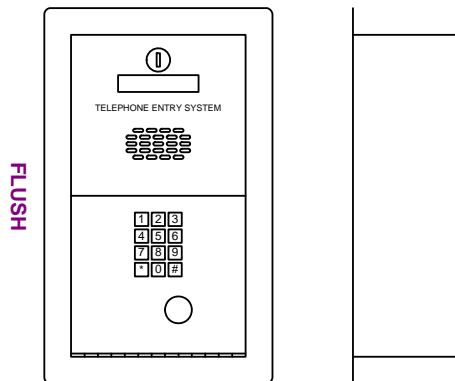


## MODEL 1802

The model 1802 is an ideal telephone entry system that is suited for applications that have limited space and can be used in residential as well as commercial applications, applications that do not require a directory, or in applications where a separate directory exist. Visitors are easily identified by voice communication and can be granted or denied access directly from a touch-tone telephone.

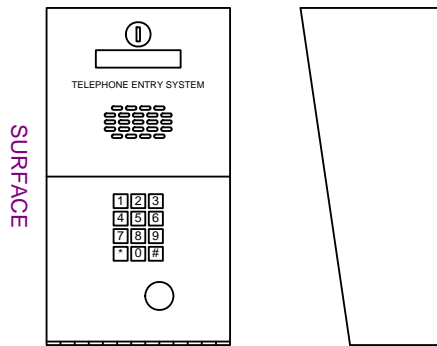

### Standard Features

- Full-Duplex Communication
- 1000 Phone Number Memory
- Programmable directory codes (1-4 digits)
- 10 and 11 digit dialing capability
- Two special inputs can be programmed for relay activation or dial-out function
- 5-Digit entry codes (6) for special needs
- Built-in clock provides automatic relay activation
- Time zone restrictions on selected entry codes
- Time clock has its own backup power source
- Flash entry codes
- 2 relays for door/gate control
- Single-line programming display uses super-twist LCD with 5/16-inch characters
- Built-in postal lock provision
- EEPROM Memory
- Power transformer included
- 2-year warranty

### Options

- Available in surface or flush mount styles.
- Mounting posts.

Dimensions	Shipping Weight	Regulatory	Power
Surface Mount: 12"H x 6.5"W x 5"D		FCC (US): DUF6VT-12874-OT-T DOC (CAN): 1736 4528 A ETL Listed	16 VAC, 20 VA, 250 ma Ringer Equivalence: 0.0 A Jack Type: RJ11C or W
Flush Mount: 14"H x 8.375"W x 3.25"D			

<b>1802 Telephone Entry System with 1000 Memory</b>		
<b>P/N</b>	<b>Description</b>	
1802-082	Surface Mount, Hands Free	Note 2
1802-089	Flush Mount, Hands Free	Note 1, 2

<b>Accessories (refer to indicated page for further description)</b>		
<b>P/N</b>	<b>Description</b>	
1701-080	20 Name Directory (pg 32)	
1702-080	60 Name Directory (pg 32)	
1710-080	200 Name Paper Directory – Surface Mount (pg 32)	
1710-081	200 Name Paper Directory – Flush Mount (pg 32)	
2600-584	Heater Kit (pg 34)	
1807-012	Handset Conversion Kit (pg 34)	

**Notes:**

- (1) Hand set option is not available on flush mount unit.
- (2) 1000 Memory included.