
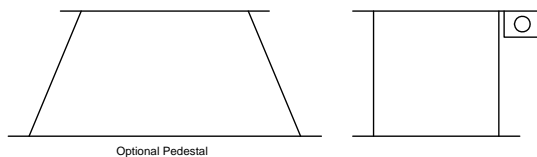


MODEL 9530 3-HP High Speed Slide Gate Operator

For gates up to 100-feet long, 5,000 Lb. maximum gate weight

The model 9530 variable speed slide gate operator is designed to operate vehicular sliding gates used in limited (Class III) or restricted (Class IV) access industrial applications only. The operator has a full feature circuit board, adjustable speed control, emergency close feature and includes chain brackets, hardware and 20-feet of #60 chain.

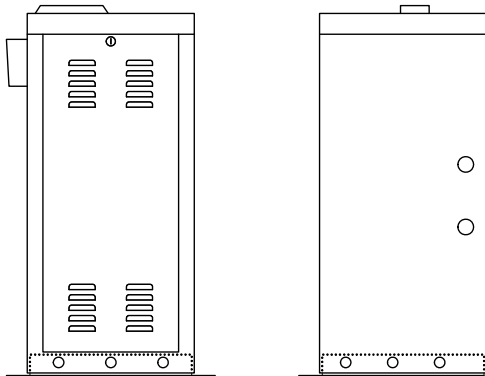

Standard Features

- 3 HP, for gates up to 100-feet, 5000 Lb
- Adjustable speed. ½ - 2ft / sec.
- 2 speed with emergency close
- Slow start / slow stop
- Electrically released, self-adjusting disc brake with manual release
- Direct driven manual limit switch
- Adjustable partial open limit
- 10:1 worm gear reduction
- Programming switches allow you to set desired mode of operation
- Anti-tailgating feature
- Gate Tracker reporting output provides operator data to access control system* (*DKS systems with card access only)
- Plug-in loop detectors
- 2 convenience outlets
- 2-year limited warranty
- 10°F to 140°F (-12°C to 62°C)

Options

- Gate operator control stations [Section 8, Pg 4]
- Plug-in loop detectors [Section 3, Pg 12]
- Slide gate accessories [Section 3, Pg 2-6]
- **Secondary entrapment prevention devices are required with this gate operator.**

Dimensions	Shipping Weight	Class	Power
9530 16"W x 34"H x 16"D	200-230 Lbs.	Class: III, IV	208 - 230 VAC, 3 ^Ø , 60 Hz 3 HP: 12.4 A
Pedestal 31.25"W x 12"H x 18"D			

9530 Slide Gate Operators		
P/N	Description	
9530-080	3 HP, 208 VAC, 3 ^Ø	
9530-081	3 HP, 230 VAC, 3 ^Ø	

Accessories		
P/N	Description	
9409-010	DoorKing plug-in 2-channel detector. Use with DKS operators only.	
9410-010	DoorKing plug-in single channel detector. Use with DKS operators only.	
1601-154	Heater Kit Heater kit for operators installed in cold weather environments. Built-in fan and thermostat.	
2600-448	20-feet #60 chain and two master links.	
9200-135	Heavy-duty pedestal mount	