

24VDC POWER SUPPLY

FEATURES

The PK-601A (PK601A) is a 24 VDC power supply designed to power auxiliary signaling devices used in *LEE DAN*®/TekTone® emergency call or other systems. The unit provides a filtered 24 VDC output rated at 1 amp.

Although specifically designed for use with emergency call systems, the PK-601A may also be used as a DC silent door opener adapter in *LEE DAN*®/TekTone® apartment intercom entry systems.

- Easy installation
- Low-voltage operation
- Multiple applications
- Precision engineering

SPECIFICATIONS

Dimensions: 5.0" High (127 mm)
2.3.75" Wide (60 mm)
2.25" Deep (57 mm)

Construction: Quality electronic components mounted on a PC board encased in a rugged extruded aluminum housing.

Connections: Screw terminals


Mounting: Surface

Output Voltage: 24VDC

Output Current: 1 amp

Power

Requirements: 16VAC, 30VA

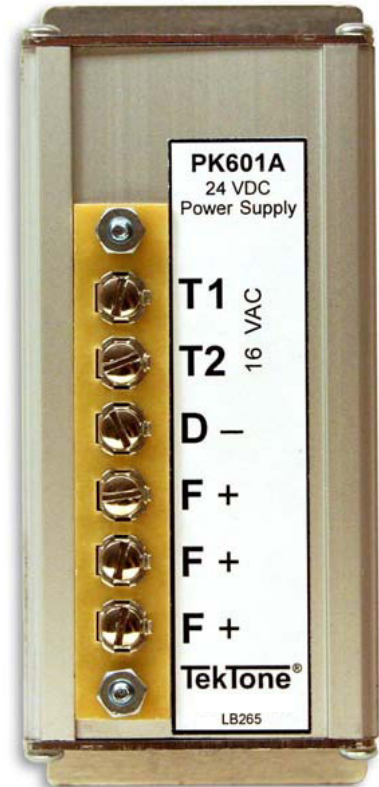

ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The power supply shall be *LEE DAN*®/TekTone® PK-601A (PK601A) , or approved equal, and shall provide 24 VDC power to auxiliary signaling devices used in specified TekTone® emergency call or other systems.

The PK-601A shall also be suitable for use as a DC silent door opener adapter in specified *LEE DAN*®/TekTone® apartment intercom entry systems.

The PK-601A circuitry shall be housed in a rugged extruded aluminum case. Positive screw terminals shall be provided for installation wiring.