

UL CORRIDOR ZONE LIGHT

APPLICATION

The LI382LED (LI-382LED) 2-Color Corridor Zone Light provides visual indication of calls when used with a nurse call system, emergency call system, or similar application.

The LI382LED Corridor Zone Light indicates an emergency call by the rapid flashing of the two red LEDs associated with the zone or area from which an emergency call has been placed. Normal (routine) calls are indicated by a steady illumination of the two white LEDs. If an emergency and normal call are placed in the same zone at the same time, the red LEDs connected to the emergency station will flash rapidly, while the white LEDs associated with the normal call will maintain a steady illumination.

The standard mounting plate features both one- and two gang mounting options.

FEATURES

- UL® 1069 Listed
- Long Lasting LEDs
- No bulb replacement required
- Plug-in connector supplied
- Attractive, flame retardant ABS plastic panel

SPECIFICATIONS

Dimensions: Height: 4.8" (122 mm)
Width: 5.0" (127 mm)
Depth: 2.755" (70 mm) from finished wall

LEDs: 2V 20mA per LED


Power: 24VDC

Finish: Base: Fog white flame-retardant (UL® 94HB) plastic.
Lens: Flame-retardant translucent polycarbonate plastic.

Housing: Fits standard one or two gang box with one or two gang ring.

REQUIRED COMPONENTS

Tek-CARE® NC110, NC150, NC200 or NC300II Nurse Call System
or, CM800 Emergency Call Systems

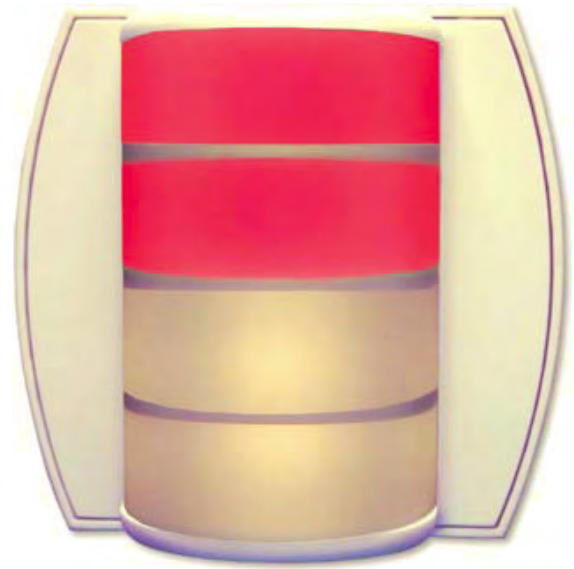

LI382LED
2-Color Corridor Zone Light
(shown with all sections lighted)

ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

Corridor lights shall be TekTone® LI382LED (LI-382LED) Corridor Zone Light, or approved equal as supplied by LEE DAN®. Corridor zone lights shall include a white flame-retardant translucent plastic lens mounted on a flame-retardant (UL® 94HB) plastic panel. The LI382LED shall provide four (4) LEDs, two (2) white and two (2) red, to differentiate between normal (routine) and emergency calls. The standard mounting base plate shall accommodate both one and two gang mounting options.

The standard mounting plate shall accommodate both one- and two-gang mounting options.

The LI382LED shall be UL® 1069 Listed, when used with the corresponding UL® 1069 nurse-call system.

Contractor shall observe all local and national electrical and building codes.