


931 & 831 AMPLIFIER WIRING


Typical Wiring Diagram for 931 (or 831) Amplifier/Power Supply With 8870, 902 or 870W Handsets Single Panel Hook-Up

8870, 902 or 870W Handset


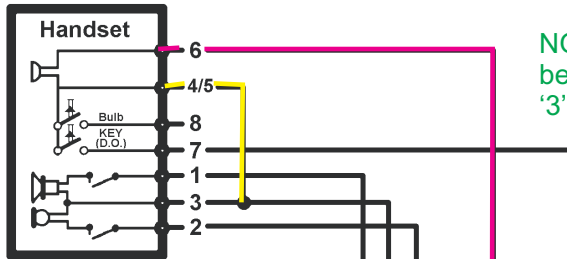


NOTE: Jumper wire MUST be placed between terminals '3' & '4/5' on each handset!

8870, 902 or 870W Handset

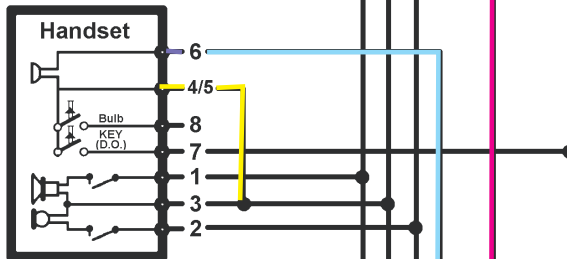

Typical Entry Panel

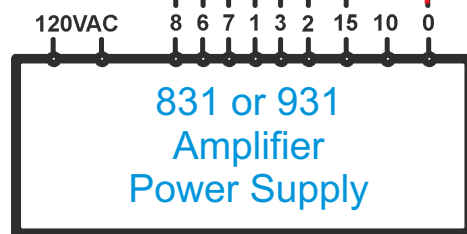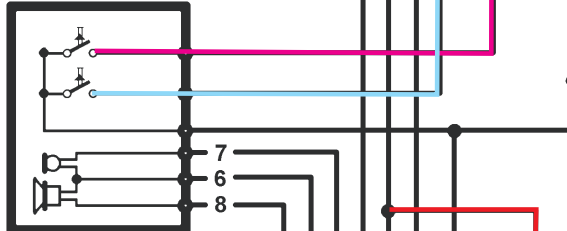

LEGEND

- AC Buzzer
- Handset Receiver
- Electret Microphone
- Push-Button
- Lobby Speaker
- Cradle Switch
- Door Opener



8870



902



870W



831



931

NOTE: Jumper wire MUST be placed between amplifier terminals '3' & '0'

INSTALLATION GUIDELINES:

- 1) All Low Voltage wiring is 22AWG unless noted elsewhere.
- 2) Terminal connections may be in different sequence on actual equipment.
- 3) Observe all local and national electrical codes.
- 4) When using the 930/000 series speaker/mic at the door station, you must place a jumper wire between terminals '5' & '6' on the 930/000.